

ELECTRICAL CHARACTERISTIC

Nominal Capacity	2.5Ah
(At 10Ma, +25°C 2.0V cut off. The capacity restored by the cell varies to current drain, temperature and cut-off)	
Rated Voltage	3.0V
Max. Recommended Continuous Current	1500mA
Max. Pulse Current Capability	3000mA
Storage (recommended)	Max. 30°C
(For more info on other conditions please consult Ramway)	
Operating Temp. Range	-40°C to +85°C
(Operating closely to limit temp. may lead to a reduced capacity, low voltage plateau reading)	
Typical Weight	30g

**Key features**

- High and stable operating voltage
- Low self-discharge rate
(less than 2% after 1-year storage at 25°C)
- Stainless steel container
- Semi-Hermetic sealing
- Non-flammable electrolyte
- Spiral type
- CE, SGS recognized

ISO9001 approved



Main application

- Utility Metering
- Memory Back-up
- Alarms & Security Devices
- Automotive electronics
- Tollgate systems
- Military electronics
- Automatic meter reading
- Professional electronics


WARNINGS!

- 1. Fire, explosion and severe burn hazard;**
- 2. Do not recharge, crush, disassemble, heat above 100°C;**
- 3. Do not solder directly to the cell.**

LOADING VOLT. AT ROOM TEMP.

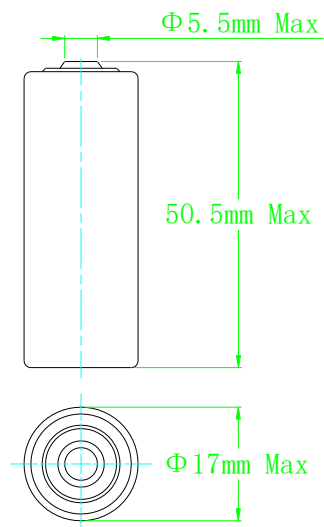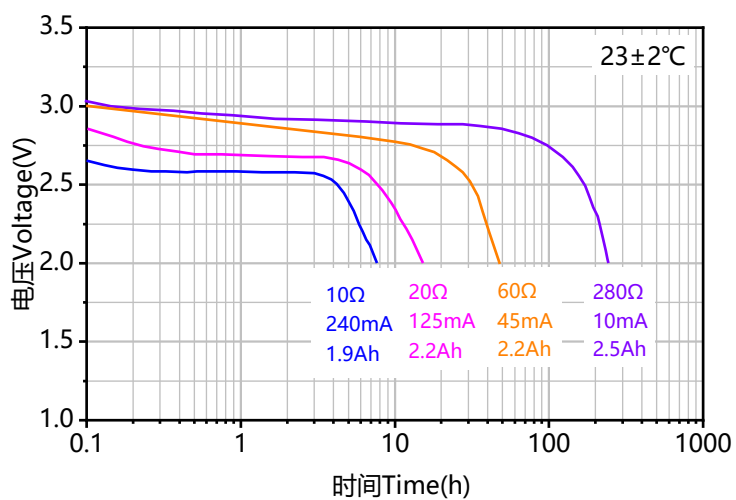

TEMPERATURE

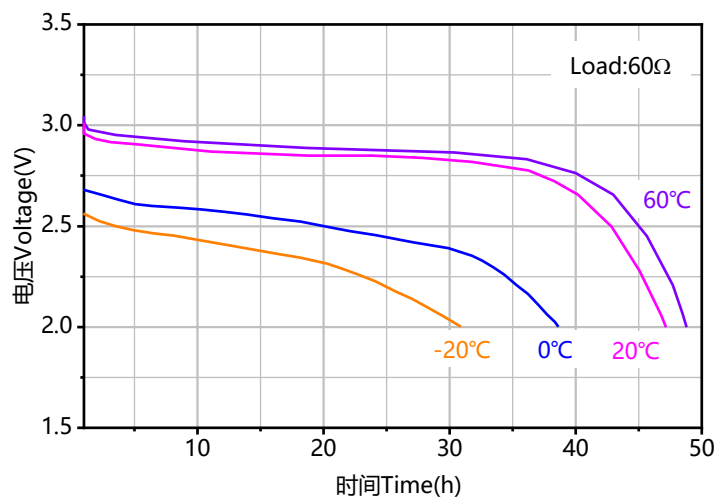

PULSE CURRENT

