

ELECTRICAL CHARACTERISTIC

Nominal Capacity

2400mAh

(1mA, 20°C±3°C, 2.0V)

Nominal Voltage

3.0V

Max. Continuous Discharge Current

1500mA

Max. Pulse Current Capability

3000mA

Storage (recommended)

Max. 30°C

Operating Temp. Range

-40°C to +70°C

Weight

22g**Key features**

- High and stable operating voltage
- Low self-discharge rate
(less than 2% after 2-year storage at 25°C)
- Stainless steel container
- Semi-Hermetic sealing
- Non-flammable electrolyte
- Spiral type
- UL, CE, SGS recognized

ISO9001 approved**Main application**



- Utility Metering
- Memory Back-up
- Alarms & Security Devices
- Automotive electronics
- Tollgate systems
- Military electronics
- Automatic meter reading
- Professional electronics

WARNINGS!


1. Fire, explosion and severe burn hazard;
2. Do not recharge, crush, disassemble, heat above 100°C;
3. Do not solder directly to the cell.



LOADING VOLT. AT ROOM TEMP.

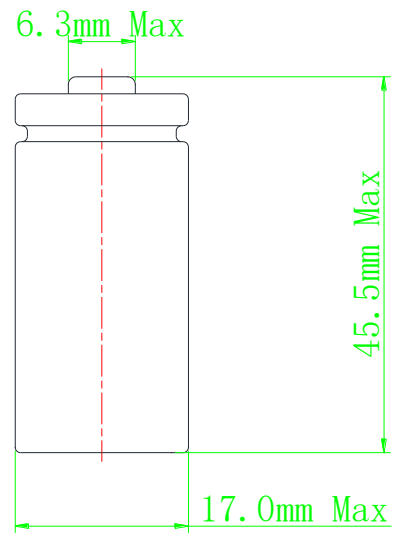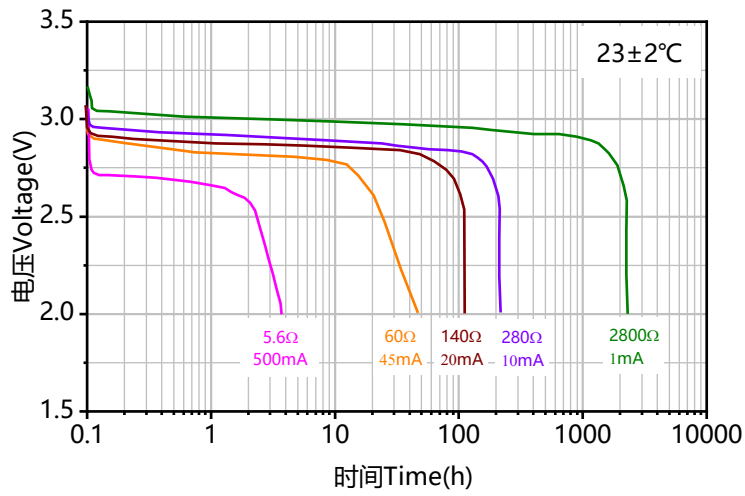

TEMPERATURE

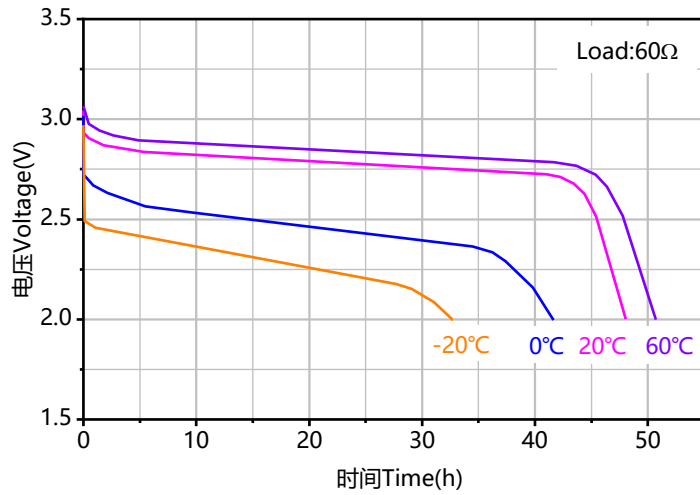

PULSE CURRENT

